



# SERIES 66 (S66) PENDANT DIRECT

May be ceiling or pendant mounted individually or in continuous rows. All units provided with two welded 12 gauge flanges to accept 5/8" (3/8" NPT) diameter stems for rigidity in pendant mounting. Also aircraft cable compatible.

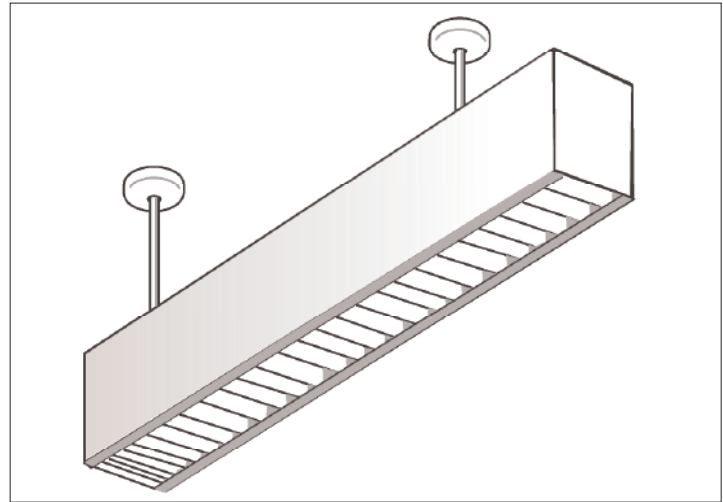

## Dimensional Data

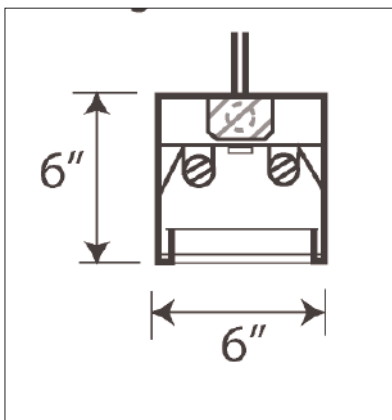

## Specifications

**Construction:** Fixture housings are die formed and spot welded for rigidity and clean appearance. Diffuser or baffle lays in directly on to fixture flange on two sides.

**Finish:** Powder painted white visible surfaces. High reflectivity coated, reflecting surfaces for improved efficiency.

**Custom colors are available: consult factory.**

**Wiring:** Standard voltage T8 Universal.

**Approval:** All units are Underwriter's Laboratories (UL) approved.

## Ordering Information

### SERIES 66 (S66) CEILING DIRECT

Catalog #	Lamp	Length
S66-2-120	1-F17T8	2'
S66-3-130	1-F25T8	3'
S66-4-140	1-F32T8	4'
S66-6-130T	2-F25T8	6'
S66-8-140T	2-F32T8	8'
S66-2-220	2-F17T8	2'
S66-3-230	2-F25T8	3'
S66-4-240	2-F32T8	4'
S66-6-230T	4-F25T8	6'
S66-8-240T	4-F32T8	8'

Add Suffix EB-Electronic T12

## Ballast Options

- EBO-** Electronic T8
- EB-** Electronic T12
- DIM-** Dimming Ballast
- EM-** Emergency Ballast (1 lamp)
- EM/2-** Emergency Ballast (2 lamp)
- RFI-** Radio Interference Filter
- FS-** External Fuse and Holder

•Note: Consult Factory on  
Compatibility EM/2 Option.

Refer to back side for Shielding Options


NEW ENGLAND  
**LIGHTING**  
INCORPORATED

# SERIES 66 (S66) PENDANT DIRECT

## Shielding Options

<b>A-</b>	Flat .110 Prismatic Acrylic	<b>ALCB-</b>	3" x 3" Parabolical Anodized (Alum)
<b>A 125-</b>	Flat .125 Prismatic Acrylic	<b>PAS-</b>	9/16" x 9/16" x 1/2" Specular Silver Parabolic Louver
<b>FOA-</b>	Flat .080 Opal Acrylic	<b>PAS 34-</b>	3/4" x 3/4" x 3/8" Specular Silver Parabolic Louver
<b>PL-</b>	1/2" x 1/2" x 3/8" White Cubed Louver	<b>PVS-</b>	1-1/2" x 1-1/2" x 1" Specular Silver Parabolic Louver
<b>CB-</b>	1" x 1" OC White Cross Baffle (Alum)		

## Installation Data

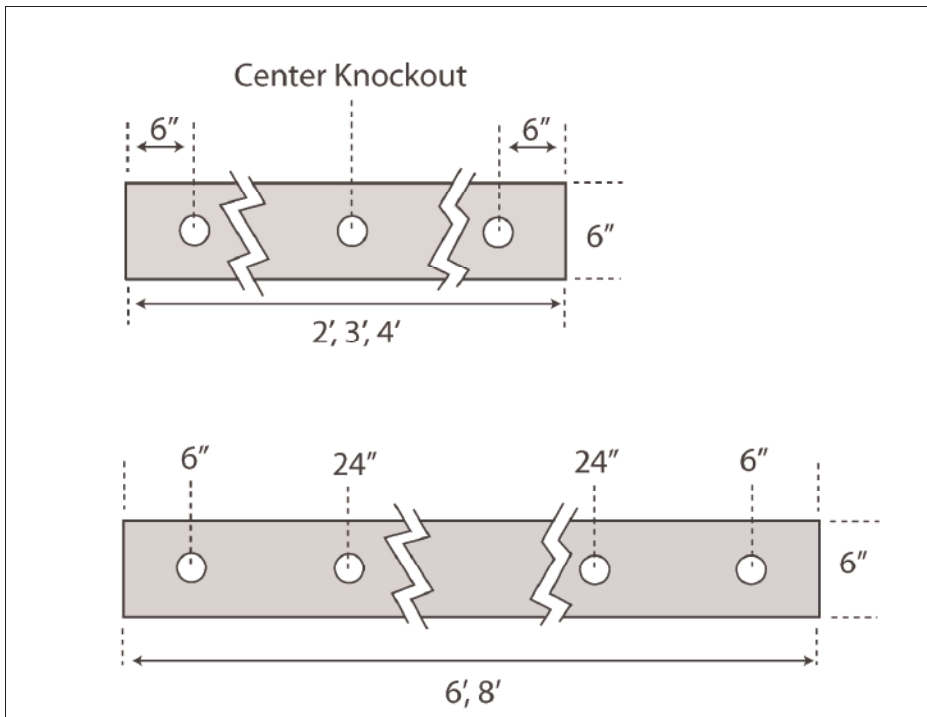

Photometrics: Photometric Information available upon request.

