



HLA-FLUORESCENT LOUVERED HI-BAY SERIES

High efficiency fluorescent louvered hi-bay luminaire. Available with 2, 3, or 4 lamps T5 and T8 in nominal 4' and 8' tandem. Body with uplight is also available.

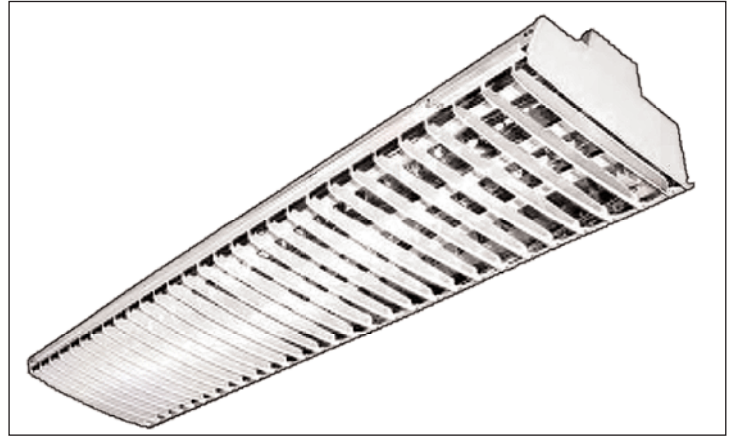

Dimensional Data

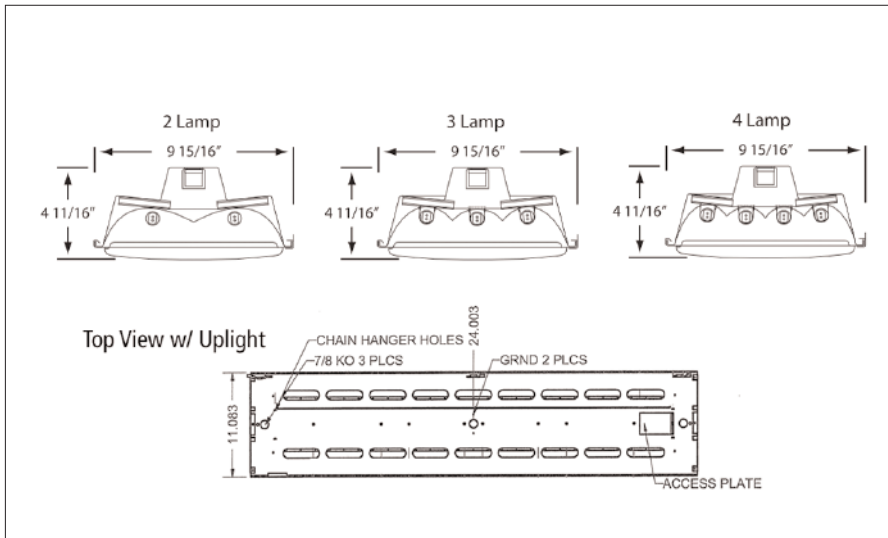

Specifications

Mounting: Mounting: Fixture may be surface mount, pendant, stem or chain hung.

Construction: Housing die formed 22 gauge cold rolled steel for strength and uniformity.

Finish: White powder having a reflectance factor exceeding 87% for premium quality.

Wiring: Standard voltage is universal voltage (UV).

Approval: All units are Underwriter's Laboratories (UL) approved.

Ordering Information

Catalog	Lamp	Length
HLA240EBO	2-F32T8	4'
HLA340EBO	3-F32T8	4'
HLA254HO	2-F54T5HO	4'
HLA228	2-F28T5	4'
HLA240TEBO	4-F32T8	8'
HLA340TEBO	6-F32T8	8'
HLA440TEBO	8-F32T8	8'
HLA254THO	4-F54T5HO	8'
HLA354THO	6-F54T5HO	8'

Example= HLA232EBO/UV/UPL

Options and Accessories

EM	1 Lamp Emergency Ballast
EM2	2 Lamp Emergency Ballast
OD	Quick Disconnect
OCS	Occupancy Sensor
FS	Fusing
DIM	Dimming Ballast
UPL	Uplight
MS	Multi-switching
UV	Univolt

Photometrics: Photometric Information available upon request.

