



MB SURFACE SERIES

MB Series features large cell semi-specular parabolic aluminum louvers to provide low brightness combined with high visual comfort.

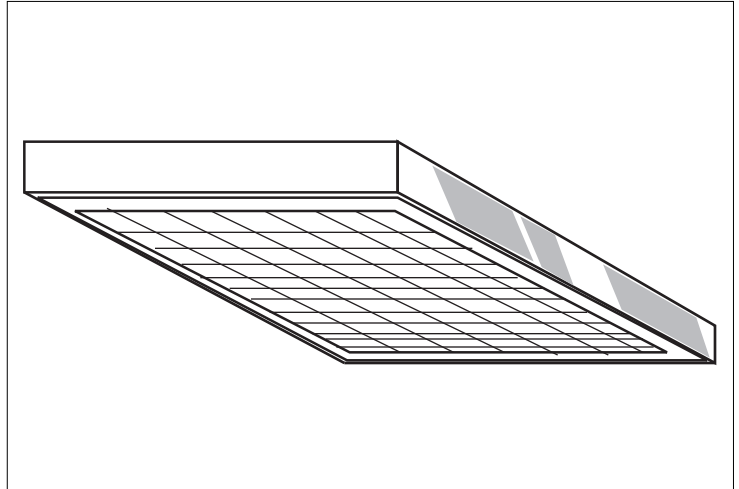

Dimensional Data

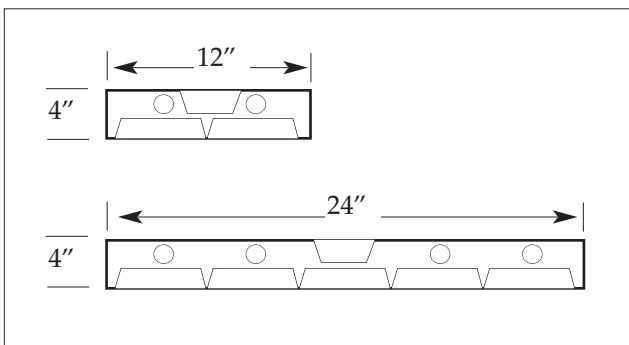

Ordering Information

MB SERIES-SURFACE

Type	Lamp	Size
MBS14240EB	2-F40T12	1X4
MBS22420EB	4-F20T12	2X2
MBS22240UEB	2-F40/U/6	2X2
MBS24240EB	2-F40T12	2X4
MBS24340EB	3-F40T12	2X4
MBS24440EB	4-F40T12	2X4
	22 Cell	1x4
	25 Cell	2x2
	55 Cell	2x4

Add Suffix "EBO"-Electronic "T8"

Specifications

Mounting: Back plate provided with adequate knockouts for either surface or pendant mounting.

Construction: All metal parts die formed from heavy gauge cold rolled steel. Housing spot welded to insure uniformity and dimensional stability. Shielding is completely enclosed in heavy gauge steel frame invisibly hinged and designed to eliminate light leaks.

Finish: All metal parts are thoroughly cleaned and treated to prevent rust and deterioration with a phosphate coating applied automatically in a five-stage process. Surfaces are then sprayed with high quality white enamel to provide a minimum of reflectance of 87%.

Diffuser: Parabolic louvers are fabricated from precision formed .020" semi-specular anodized aluminum blades and interlocked for added rigidity. Cell size shall be 4"x 4"x 1.2" for 2"x 2" and 2 x 4 or 4.7" x 1.2" for 1'x 4' units. Specular clear anodized available on special order.

Wiring: All ballast are 120 volt.


Approval: All units are Underwriter's Laboratories (UL) approved.

Photometrics: Photometric Information available upon request.



MB SURFACE SERIES

Installation Data

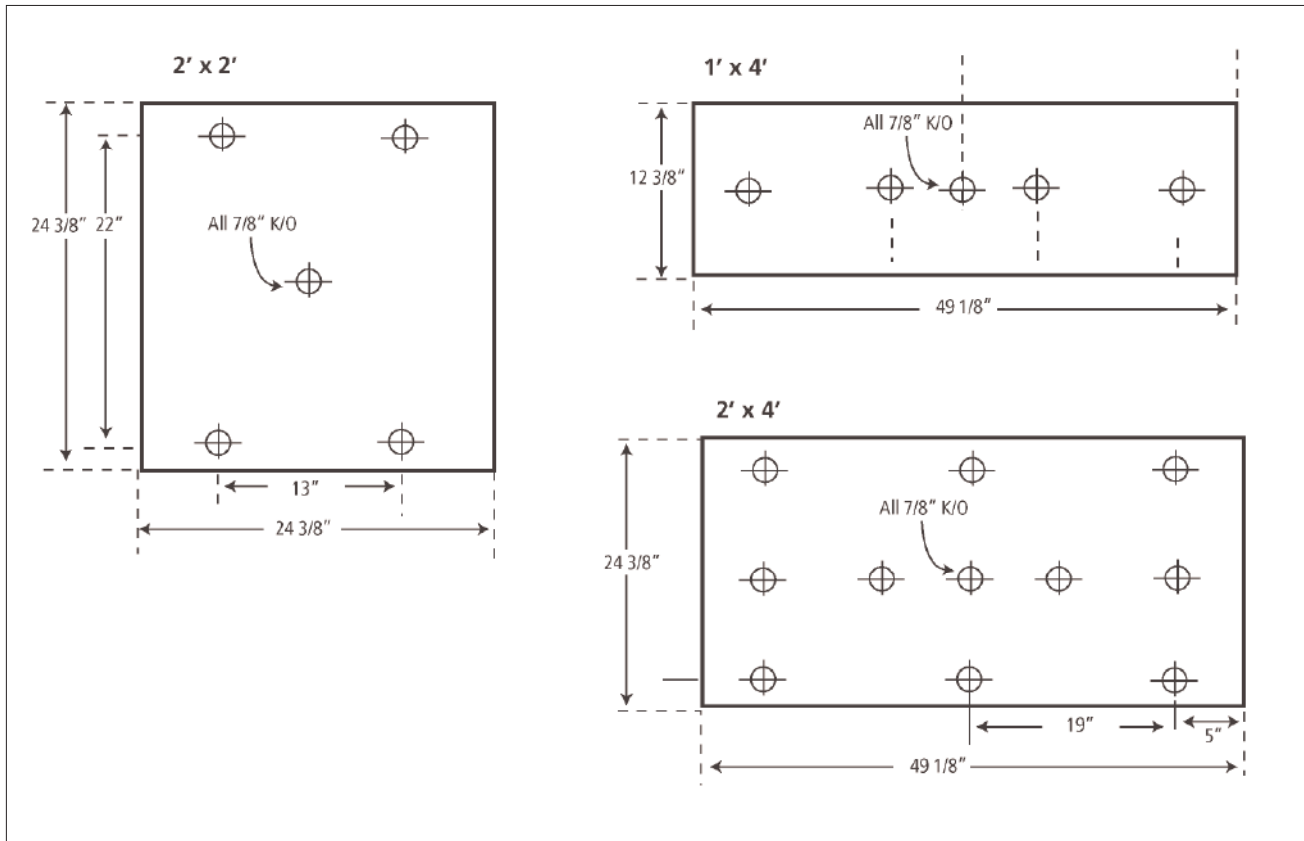

NEW ENGLAND
LIGHTING
INCORPORATED