



ROCKPORT 6500 SERIES

Tri-directional prismatic diffuser highlights this low profile specification grade wall bracket. Ideally suited for corridor or areas requiring a more sophisticated appearance.

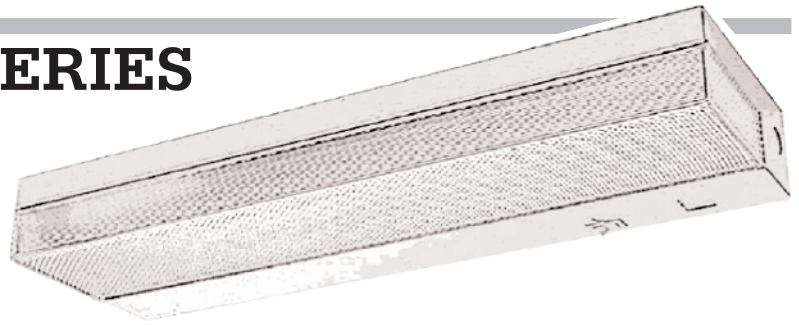

Dimensional Data

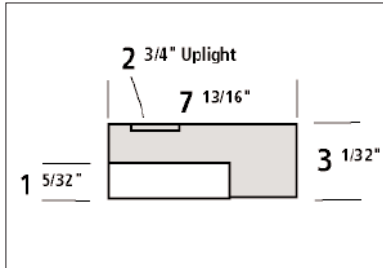

Specifications

Mounting: Units must be wall mounted. Adequate KOs provided to insure base of installation.

Construction: Fixture housing is die formed of heavy gauge steel to insure uniformity and dimensional stability. Up light component and lamp divider standard

Finish: All metal parts are thoroughly cleaned and treated with a phosphate coating applied automatically in a five stage process to prevent rust. Surfaces are then sprayed with high quality baked white enamel to insure maximum light output.

Diffuser: Virgin acrylic lens with linear front and prismatic sides and bottom for maximum light control. Lens held securely by invisible spring latches.

Wiring: Standard ballast 120 volt.

Approval: All units are Underwriters Laboratories (UL) approved.

Ordering Information

ELECTRONIC T12			ELECTRONIC OCTRON T8		
Unit #	Length	Lamps	Unit #	Length	Lamps
RT65120EB	24"	1-F20T12	RT65120EBO	24"	1-F17T8
RT65220EB	24"	2-F20T12	RT65220EBO	24"	2-F17T8
RT65130EB	36"	1-F30T12	RT65130EBO	36"	1-F25T8
RT65230EB	36"	2-F30T12	RT65230EBO	36"	2-F25T8
RT65140EB	48"	1-F40T12	RT65140EBO	48"	1-F32T8
RT65240EB	48"	2-F40T12	RT65240EBO	48"	2-F32T8

Accessories Add Suffix

BL	Black Exterior Housing	+ EM/2	Emergency Ballast (2 lamp)
TL	Uplight (Extruded Acrylic)-3 lamp only	RFI	Radio Interference Filter
EB	Electronic T12	FS	External Fuse and Holder
* DIM	Dimming Ballast	CO	Grounded Convenience Outlet
EM	Emergency Ballast (1 lamp)	+ Consult Factory for Ballast Compatibility	

Photometrics: Photometric Information available upon request.

