


# 200 SERIES

Contemporary styled milk white acrylic diffuser with virtually invisible mount evenly distributes the light of a full range of energy efficient lamps. A functional yet distinctive long lasting lighting source for home or apartment.



## Dimensional Data

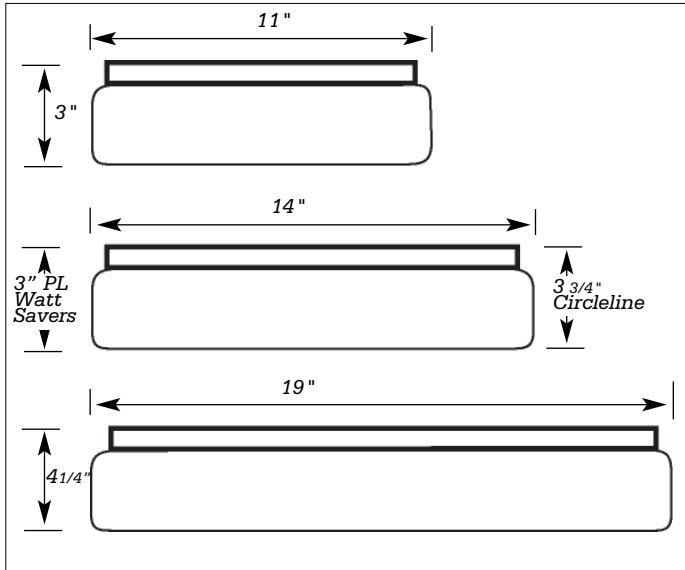

## Specifications

**Mounting:** Back Plate provided with adequate knockouts and mounting holes for either wall or ceiling installation.

**Construction:** All metal parts are die formed from heavy gauge cold rolled steel. Exterior finish high quality white enamel.

**Diffuser:** One piece .125 smooth opal acrylic for a fully luminous light source.

**Wiring:** Circleline ballast are ETL-CBM, Class P 120 volt. HPF Standard on 22-32 and 32-40 watt units. All PL ballast normal power factor. High power factor ballast available upon request.

**Approval:** All units are Underwriter's Laboratories (UL) approved.

## Ordering Information

Unit #	Lamp	Size	Unit #	Lamp	Size
CIRCLELINE			PL WATT SAVERS		
2102	1-22w	11"	2102/PL7	1-PL7	11"
2103	1-32w	14"	2102/PL9	1-PL9	11"
2105H (HPF)	1-22w,1-32w	14"	2102/PL13	1-PL13	11"
2104	1-40w	19"	2102/2PL7	2-PL7	11"
2107 (HPF)	1-32w,1-40w	19"	2102/2PL9	2-PL9	11"
			2102/2PL13	2-PL13	11"
			2103/2PL7	2-PL7	14"
			2103/2PL9	2-PL9	14"
			2103/2PL13	2-PL13	14"
			2103/3PL13	3-PL13	14"
			2104/3PL13	3-PL13	19"
			2104/4PL13	4-PL13	19"


Available with Black Base. Add suffix BL to catalog number.

**Photometrics:** Photometric Information available upon request.



# 200 SERIES

## Installation Data

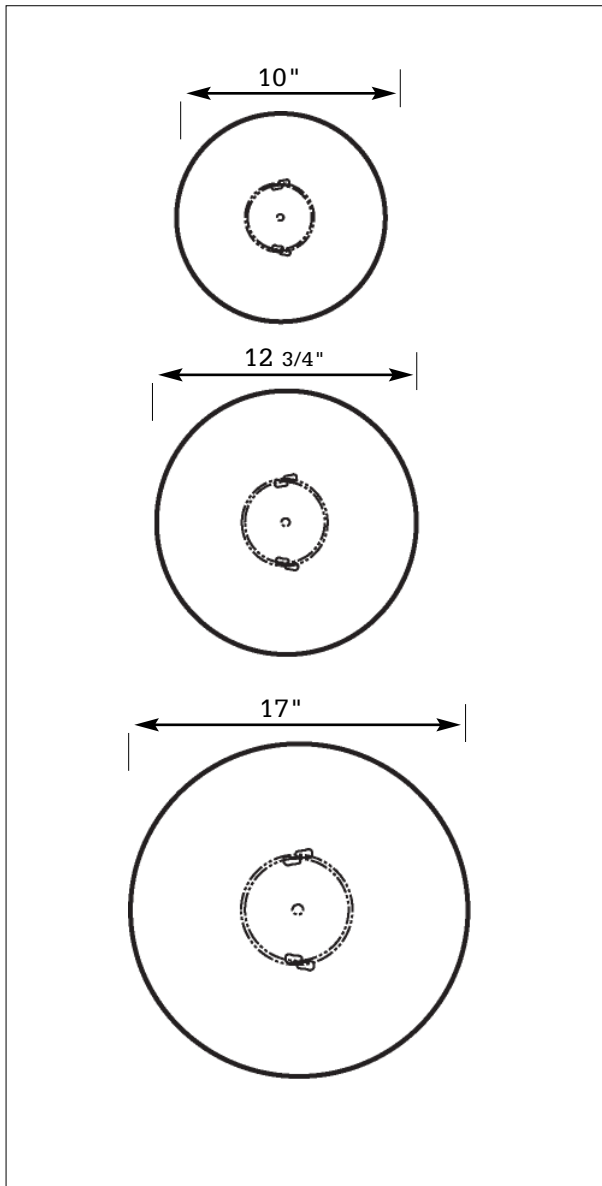

NEW ENGLAND  
**LIGHTING**  
INCORPORATED