


# 200E ELECTRONIC BALLAST SERIES

Contemporary styled milk white acrylic diffuser with virtually invisible mount evenly distributes the light of a full range of energy efficient lamps. A functional yet distinctive long lasting lighting source for home or apartment.



## Dimensional Data

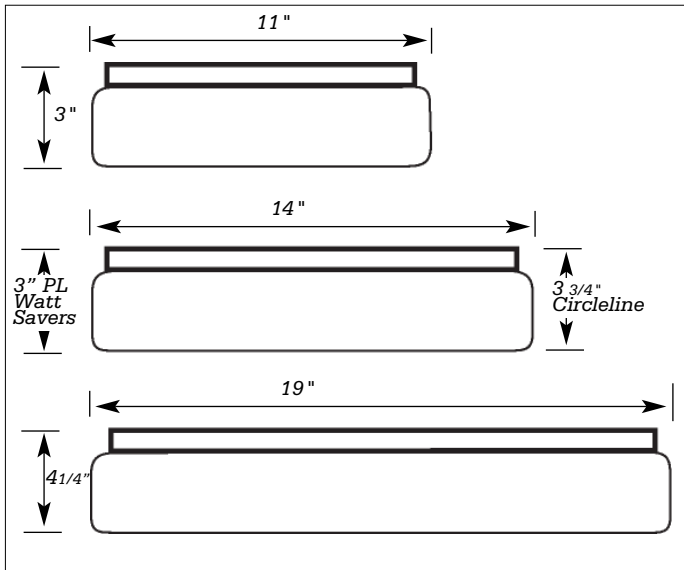

## Specifications

**Mounting:** Back Plate provided with adequate knockouts and mounting holes for either wall or ceiling installation.

**Construction:** All metal parts are die formed from heavy gauge cold rolled steel. Exterior finish high quality white enamel.

**Diffuser:** One piece .125 smooth opal acrylic for a fully luminous light source.

**Wiring:** Circleline ballast are ETL-CBM, Class P 120 volt. HPF Standard on 22-32 and 32-40 watt units. All PL ballast normal power factor. High power factor ballast available upon request.

**Approval:** All units are Underwriter's Laboratories (UL) approved.

## Ordering Information


Unit #	Lamp	Size	Unit #	Lamp	Size
CIRCLELINE			MINIATURE QUAD TUBES		
2102EB	1-22w	11"	2102/PL13EBQ	1-13w	11"
2103EB	1-32w	14"	2102/2PL13EBQ	2-13w	11"
2105EB	1-22w,1-32w	14"	2103/2PL13EBQ	2-13w	14"
2107EB	1-32w,1-40w	19"	2103/2PL18EBQ	2-18w	14"
			2104/3PL13EBQ	3-13w	19"
			2104/3PL18EBQ	3-18w	19"
			2104/2PL26EBQ	2-26w	19"
			2104/2PL32EBQ	2-32w	19"
Options:	BL suffix	Black Base			
	LEX suffix	Lexan Lens			
	EM suffix	Emergency Ballast*			
		<i>*Note: 2" extension collar required for emergency ballast</i>			

**Photometrics:** Photometric Information available upon request.



# 200E ELECTRONIC BALLAST SERIES

## Installation Data

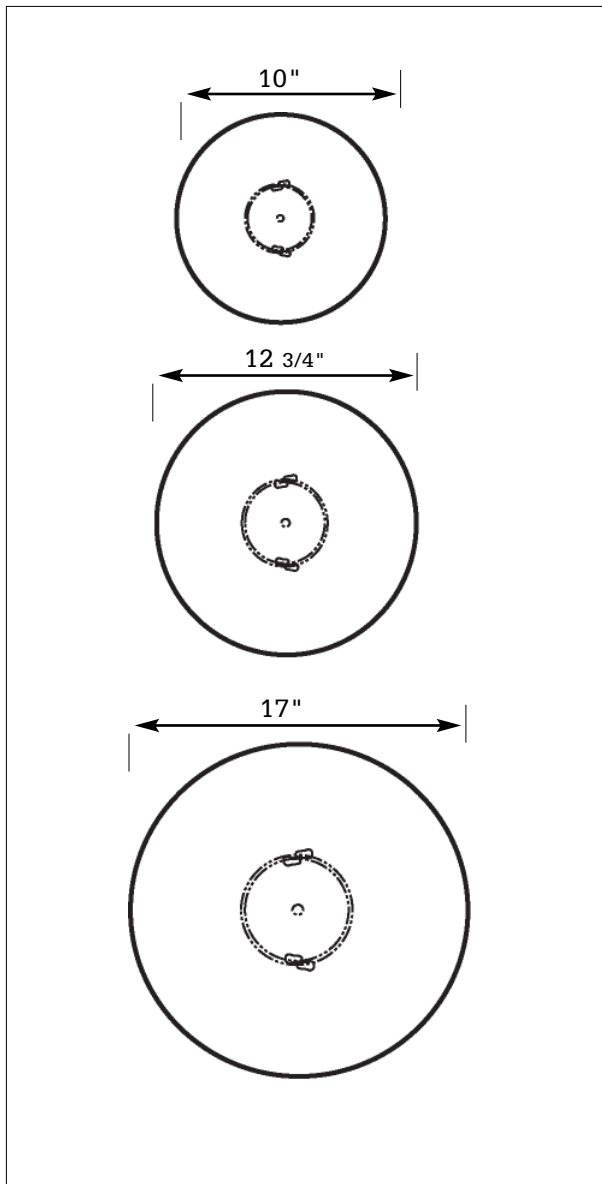

NEW ENGLAND  
**LIGHTING**  
INCORPORATED