



900 SERIES

A sleek new contemporary shallow cloud of light meets today's most demanding lighting designs. Softly contoured opal acrylic diffuser evenly distributes both circleline and miniature twin tube lamps.

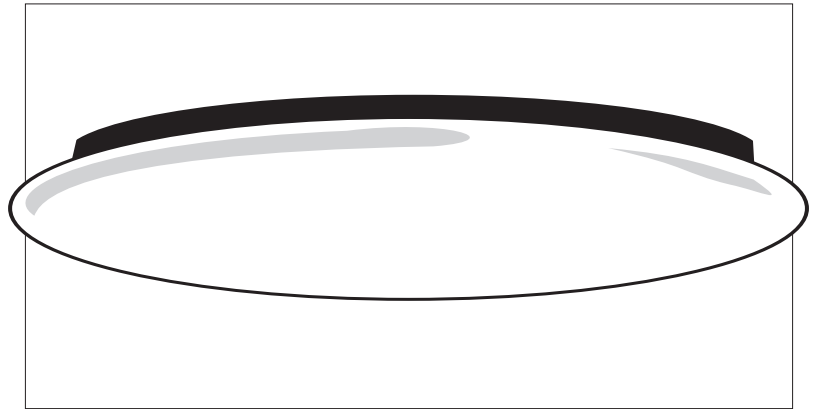

Dimensional Data

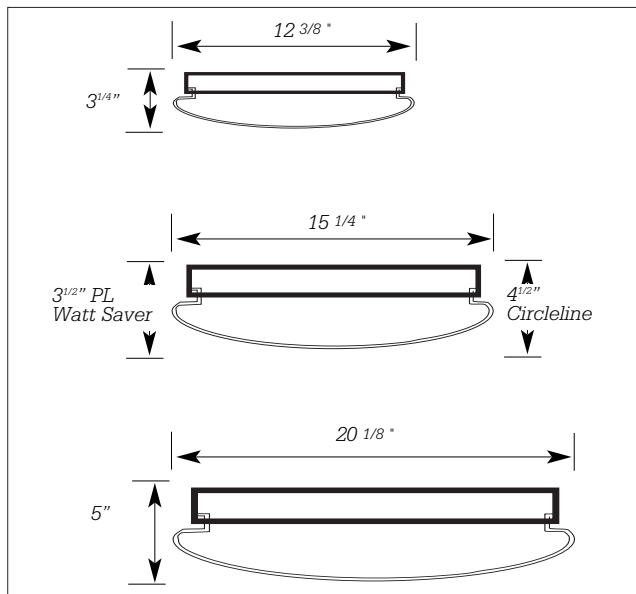

Specifications

Mounting: Back Plate provided with adequate knockouts and mounting holes for either wall or ceiling installation.

Construction: All metal parts are die formed from heavy gauge cold rolled steel. Exterior finish high quality white enamel.

Diffuser: One piece .125 smooth opal acrylic for a fully luminous light source.

Wiring: Circleline ballast are ETL-CBM, Class P 120 volt. HPF Standard on 22-32 and 32-40 watt units. All PL ballast normal power factor. High power factor ballast available upon request.

Approval: All units are Underwriter's Laboratories (UL) approved.

CIRCLELINE

UNIT #	LAMP	SIZE
9102	22W	12"
9103	32W	15"
9105H	22-32W	15"
9104	40W	20"
9107	32-40W	20"

MINIATURE TWIN TUBES

UNIT #	LAMP	SIZE
9102/PL7	1-PL7	12"
9102/PL9	1-PL9	12"
9102/PL13	1-PL13	12"
9102/2PL7	2-PL7	12"
9102/2PL9	2-PL9	12"
9102/2PL13	2-PL13	12"
9103/2PL7	2-PL7	15"
9103/2PL9	2-PL9	15"
9103/PL13	1-PL13	15"
9103/2PL13	2-PL13	15"
9103/3PL13	3-PL13	15"

Available with Black Base. Add suffix BL to catalog number.


NEW ENGLAND

 INCORPORATED



900 SERIES

Installation Data

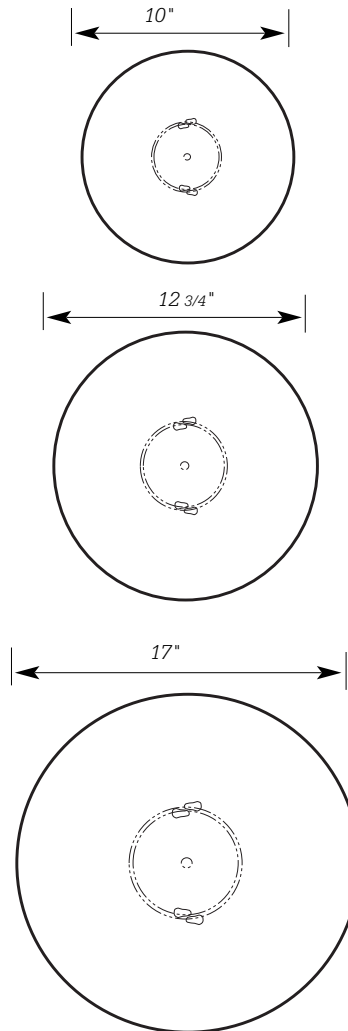

Photometric Information
available upon request.