



# SIDEMOUNT STRIP SERIES

Shallow profile open fluorescent channel in lengths from 18" to 96" with multiple lamp combinations. Two reflector choices combined with ease of installation make these units ideal for cove, valance and small areas with size restrictions.

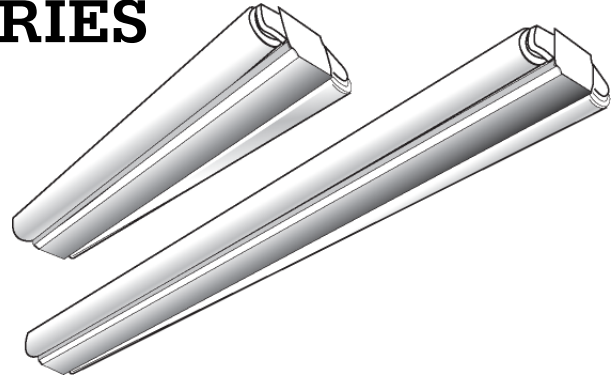

## Dimensional Data

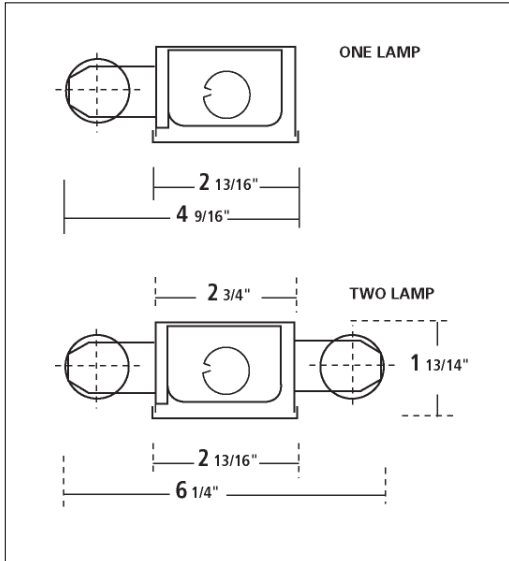

## Specifications

**Mounting:** Fixtures may be ceiling or wall mounted individually or in continuous rows. When mounting in rows, turn end cap ninety degrees for joiner strap.

**Construction:** Housing is die formed of heavy gauge steel designed for maximum strength and uniformity. Wiring components are mounted in the one piece back housing, permitting the removal of the cover for maintenance or cleaning without disturbing any of the inner wiring.

**Finish:** All metal parts are thoroughly cleaned and treated to prevent rust and deterioration with a phosphate coating applied automatically in a five stage process. All parts are electrostatically sprayed with high quality white enamel to provide a minimum reflectance of 87%.

**Wiring:** All ballast 120 volt, 60 hertz.

**Approval:** All units are Underwriter's Laboratories (UL) approved.

## Ordering Information

Catalog #	Lamp	Catalog #	Lamp	Length
ELECTRONIC T12		ELECTRONIC OCTRON T8		
1 Lamp				
SM115	1-F15T12			18"
SM120	1-F20T12	SM120EBO	1-F17T8	24"
SM130	1-F30T12	SM130EBO	1-F25T8	36"
SM130TEB	2-F30T12	SM130TEBO	2-F25T8	72"
SM140EB	1-F40T12	SM140EBO	1-F32T8	48"
SM140TEB	2-F40T12	SM140TEBO	2-F32T8	96"
2 Lamp				
SM215EB	2-F15T12			18"
SM220EB	2-F20T12	SM220EBO	2-F17T8	24"
SM230EB	2-F30T12	SM230EBO	2-F25T8	36"
SM230TEB	4-F30T12	SM230TEBO	4-F25T8	72"
SM240EB	2-F40T12	SM240EBO	2-F32T8	48"
SM240TEB	4-F40T12	SM240TEBO	4-F32T8	96"

**Photometrics:** Photometric Information available upon request.



# SIDEMOUNT STRIP SERIES

## Options and Accessories Add Suffix

- \*DIM            Dimming Ballast
- EM             Emergency Ballast (1 lamp)
- EM/2         Emergency Ballast (2 lamp)
- RFI            Radio Interference Filter
- FS             External Fuse and Holder
- CORD-3W    6' 3 Wire Cord and Plug

\* Available Electronic T12 or Electronic T8

## Installation Data

