
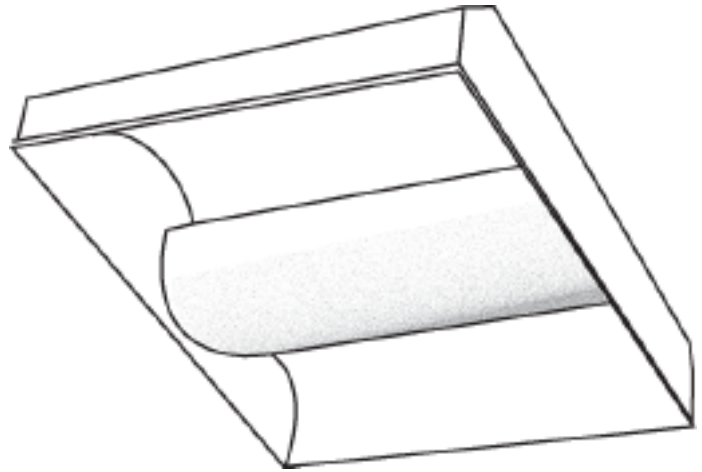


# DPG CENTER BASKET SERIES

Specification grade direct and indirect grid unit provides glare free along with superior brightness control illumination for environmentally comfortable appearance.

## Dimensional Data

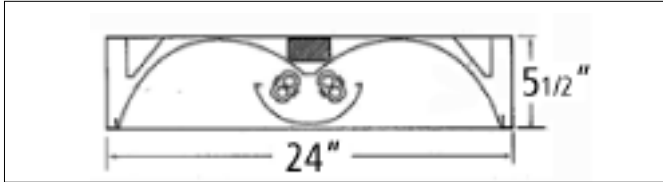

## 2' x 2' and 2' x 4' Recessed **D**irect **I**ndirect CENTER BASKET

## Ordering Information

Catalog #	Lamp	Size
ELECTRONIC T8 & BIAx		
<b>DPG217UV</b>	<b>2-F17T8</b>	<b>2x2</b>
<b>DPG317UV</b>	<b>3-F17T8</b>	<b>2x2</b>
<b>DPG124UV</b>	<b>1-40BIAx</b>	<b>2x2</b>
<b>DPG224UV</b>	<b>2-40wBIAx</b>	<b>2x2</b>
<b>DPG324UV</b>	<b>3-40wBIAx</b>	<b>2x2</b>
<b>DPG232UV</b>	<b>2-F32T8</b>	<b>2x4</b>
<b>DPG332UV</b>	<b>3-F32T8</b>	<b>2x4</b>
ELECTRONIC T5		
<b>DPG214UV</b>	<b>2-F14T5</b>	<b>2x2</b>
<b>DPG314UV</b>	<b>3-F14T5</b>	<b>2x2</b>
<b>DPG228UV</b>	<b>2-F28T5</b>	<b>2x4</b>
<b>DPG328UV</b>	<b>3-F28T5</b>	<b>2x4</b>
<b>DPG254HOT5UV</b>	<b>2-F54T5HO</b>	<b>2x4</b>
<b>DPG354HOT5UV</b>	<b>3-F54T5HO</b>	<b>2x4</b>

\*Consult Factory for other configurations.

## Accessories Add Suffix

* <b>EM</b>	Emergency Ballast 1Lamp.
* <b>EM/2</b>	Emergency Ballast 2Lamp.
<b>DIM</b>	Dimming Ballast.
<b>OD</b>	Quick Disconnect
* Supply voltage required	

## Specifications

**Mounting:** Units are designed to be installed into recessed inverted T-Bar ceilings. All units have wire hanger tabs for independent wire suspension.

**Construction:** Die formed and spot welded, heavy gauge cold rolled steel housing assembly.

**Finish:** All metal parts are high film white powder coated. Interior reflectors are low gloss high reflective finish for soft, uniform indirect light distribution.

**Shielding:** Snap-on white perforated metal basket with opal acrylic lens as inlay.

**Wiring:** Utilizes efficient T8 and T5 fluorescent lamps. Access plate provides easy access through top of fixture. Universal voltage is standard.

**Approval:** All units are (UL) listed.

## Photometrics

Photometric Information available upon request.

