



RS SERIES

Designed for all inverted T grid ceilings in both four and eight foot lengths. Provides ideal open linear illumination for retail applications.

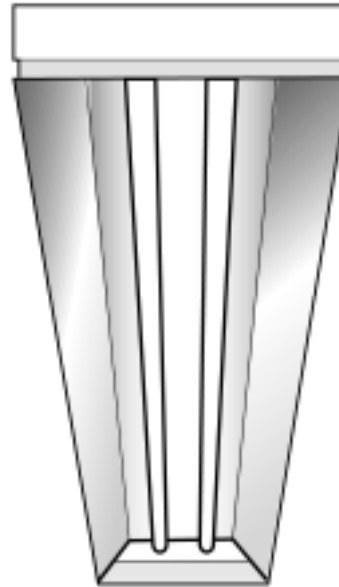

Dimensional Data

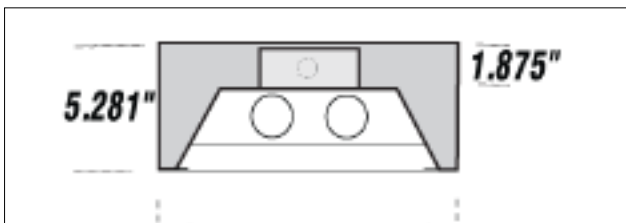

Specifications

Mounting: Units are designed so body and reflector rest on 4' and 8' main tees and cross tees – 12" on center. Removable end sections for continuous row mounting. All units have wire hanger tags for independent wire suspension.

Construction: Fixture housing is die formed of heavy gauge steel in conjunction with die embossments to insure maximum rigidity and dimensional stability.

Finish: All metal parts are thoroughly cleaned and treated with a phosphate coating to prevent rust. Surfaces are electrostatically sprayed with high quality white enamel for maximum reflectance.

Wiring: Standard voltage is 120v.

Approval: All units are (UL) listed.

Ordering Information

Catalog #	Lamp	Length
ELECTRONIC T12		
RS240EB	2-F40T12	4'
RS240TEB	4-F40T12	8'
RS296EB	2-F96T12	8'
ELECTRONIC OCTRON T8		
RS240EBO	2-F32T8	4'
RS240TEBO	4-F32T8	8'
RS296EBO	2-F96T8	8'
RS296HOEBO	2-F96T8HO	8'

Accessories Add Suffix

EM	Emergency Ballast 1Lamp.
EM/2	Emergency Ballast 2Lamp.
DIM	Dimming Ballast. (T8 and T12)
RFI	Radio Interference Filter.
FS	External Fuse and Holder.

Photometrics

Photometric Information available upon request.

