



RECESS TROFFER FLANGE 2X4

Heavy duty recessed flanged fixture designed for installation in plaster or concealed mechanical ceilings. Multiple lamp quantities along with a variety of diffusing media to meet and compliment most lighting specifications.

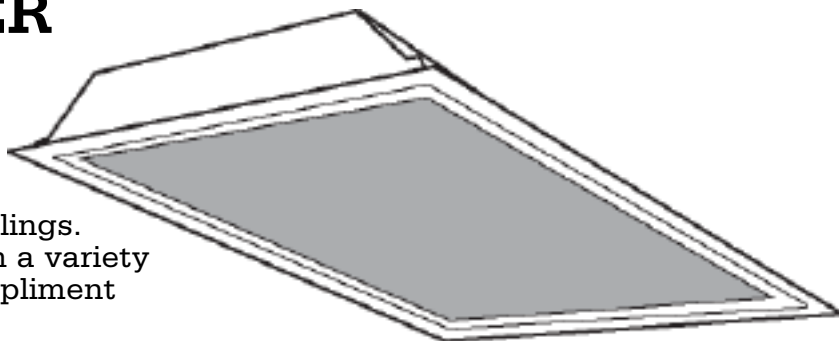

Dimensional Data

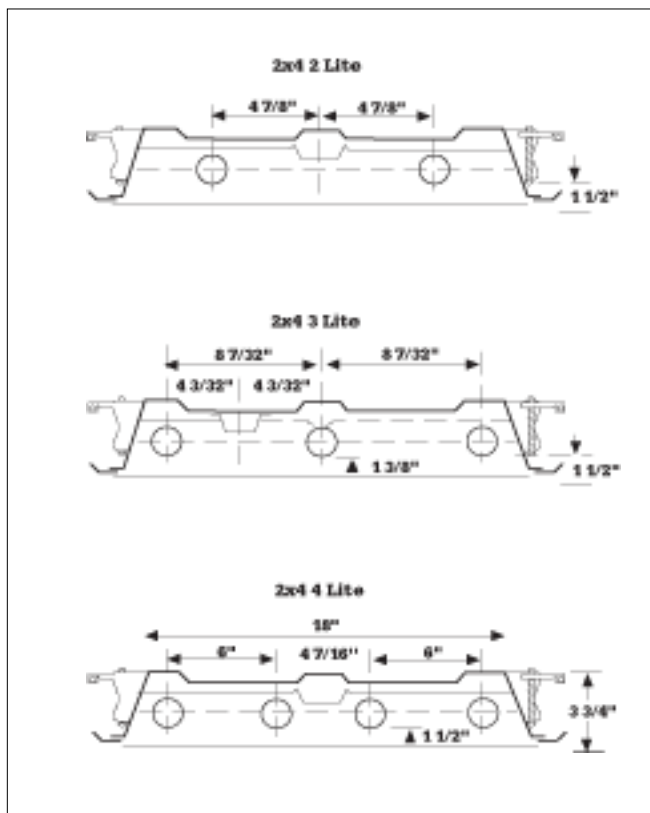

Specifications

Mounting: Designed for recess installation in either H or Z spline, plaster, or wood frame ceiling. Integral level lugs allow for positive mounting and alignment to ceiling from inside fixture housing. End trims are removable for continuous row mounting.

Construction: Fixture housing is die formed of heavy gauge steel in conjunction with die embossments to insure maximum rigidity and dimensional stability. Edges are rounded for optimum safety.

Shielding: 100% virgin acrylic is standard. All shielding options are completely enclosed in a heavy gauge steel frame which is invisibly hinged. (See reverse for optional frames and shielding.)

Finish: All metal parts are thoroughly cleaned and treated with a phosphate coating to prevent rust. Surfaces are electrostatically sprayed with high quality white enamel for maximum reflectance.

Wiring: Access plate provides easy access through top of fixture to ballast leads. Standard voltage is 120v.

Approval: All units are (UL) listed.

Ordering Information

Catalog #	Lamp	Size	Catalog #	Lamp	Size
ELECTRONIC T12			ELECTRONIC OCTRON T8		
RWF240AEB	2-F40T12	2x4	RWF240AEBO	2-F32T8	2x4
RWF340AEB	3-F40T12	2x4	* RWF340AEBO	3-F32T8	2x4
RWF440AEB	4-F40T12	2x4	* RWF440AEBO	4-F32T8	2x4

*Standard Unit - single ballast-for dual switching add suffix "/2".
Example: **RWF340AEBO/2**.



RECESS TROFFER FLANGE 2X4

Shielding Options for shield options change "A" to: Accessories Add Suffix


A125	.125 Prismatic Acrylic.
A156	.156 Prismatic Acrylic.
DR	High Impact Prismatic Acrylic.
FOA	Flat Opal Acrylic.
DPA	Drop Opal Acrylic Dish.
PL	1/2 x 1/2 x 1/2 White Cube Louver.
* PAS	9/16 x 9/16 x 1/2 Specular Silver Parabolic Louver.
* PAS34	3/4 x 3/4 x 1/2 Specular Silver Parabolic Louver.
* PVS	1 1/2 x 1 1/2 x 1 Specular Silver Parabolic Louver.
PVW	1 1/2 x 1 1/2 x 1 White Parabolic Louver.
* Prismatic Acrylic/Parabolic Louver Combination	Example: PASAL .

REF	Internal Polished Aluminum Reflector.
REFS	Internal Specular Silver Reflector.
NY	New York City Approved - 20GA.
EM	Emergency Ballast-Standard Light 1Lamp. (For 2 Lamp Ballast - EM/2).
DIM	Dimming Ballast.
RFI	Radio Interference Filter.
FS	External Fuse and Holder.
WP63	6' 3 Wire Whip.
MS	Master/Slave (6' Interconnect Standard).
PP	Shrink Wrap Pallet Less Cartons. Corrugated End Caps for Protection.
L	Lamped.


Frame Options

RG	White Regress Frame.
RGB	Black Regress Frame.
TP	Tamper Proof Latches.
Example: RWF240URGAEB	

Installation Data

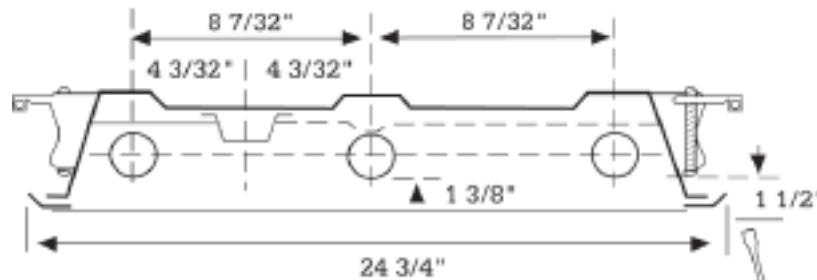

Ceiling Opening = 24" (+/- 1/2") x 48 1/4" (+/- 1/4")

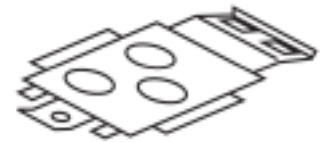

Access Plate

Photometrics

Photometric Information available upon request.

