


SCG SERIES DEEP CELL 2X4 GRID

Semi-specular aluminum deep cell parabolic recessed grid troffer designed for installation in exposed T-Bar acoustical ceiling. Parabolic luminaires are designed to provide superior low brightness combined with high visual comfort

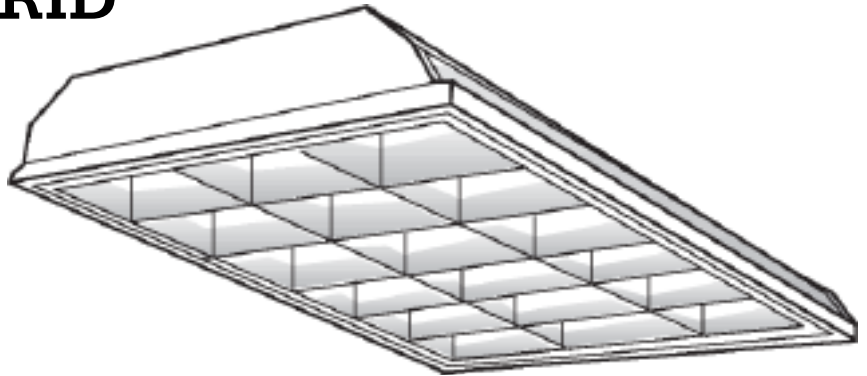

Specifications

Mounting: Units are designed to be installed into recessed inverted T-Bar ceilings. All units have wire hanger tabs for independent wire suspension.

Construction: Fixture housing is die formed of heavy gauge steel in conjunction with die embossments to insure maximum rigidity and dimensional stability.

Louver: Large cell 3" deep low iridescence anodized aluminium in a matte finish parabolic louvers are precision mitered, rigidly interlocked to maintain parabolic contours assuring a high visual comfort (VCP) rating. Anodized louvers resist stains and scratches and can be cleaned

repeatedly without damage to finish. Louver has full bordered black reveal and hinges from either side without use of tools.

Finish: All steel parts are thoroughly cleaned and treated with a phosphate coating to prevent rust. Surfaces are electrostatically sprayed with high quality white enamel for maximum reflectance.

Wiring: Access plate provides easy access through top of fixture to ballast leads. Standard voltage is 120v.

Approval: All units are (UL) listed.

Cell Size: 7" x 7-1/2"

Ordering information

<i>Catalog #</i>	<i>Lamp</i>	<i>Cells</i>	<i>Catalog #</i>	<i>Lamp</i>	<i>Cells</i>
ELECTRONIC T12			ELECTRONIC OCTRON T8		
SCG2424012EB	2-F40T12	12	SCG2424012EBO	2-F32T8	12
SCG2424018EB	2-F40T12	18	SCG2424018EBO	2-F32T8	18
SCG2434018EB	3-F40T12	18	* SCG2434012EBO	2-F32T8	12
SCG2424032EB	2-F40T12	32	* SCG2434032EBO	3-F32T8	32
SCG2444012EB	4-F40T12	12	* SCG2444032EBO	4-F32T8	32


*Standard Unit - single ballast-for dual switching add suffix "/2".

Example: **SCG2434018EB0/2.**



SCG SERIES DEEP CELL 2X4 GRID


Dimensional Data

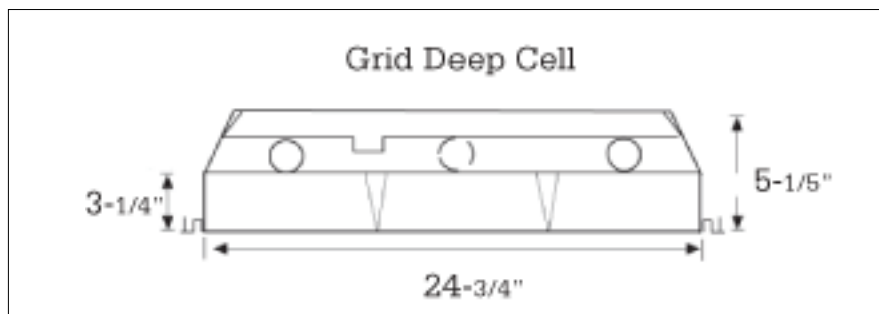

Accessories Add Suffix

- REF** Internal Polished Aluminum Reflector.
- REFS** Internal Specular Silver Reflector.
- NY** New York City Approved - 20GA.
- EM** Emergency Ballast-Standard Light 1Lamp.
(For 2 Lamp Ballast -**EM/2**).
- DIM** Dimming Ballast.
- RFI** Radio Interference Filter.
- FS** External Fuse and Holder.
- WP63** 6' 3 Wire Whip.
- MS** Master/Slave (6' Interconnect Standard).
- PP** Shrink Wrap Pallet Less Cartons.
Corrugated End Caps for Protection.

Installation Data

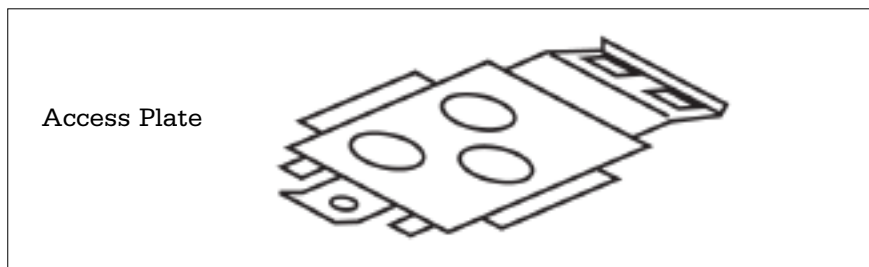

Photometrics

Photometric Information available upon request.

