



SRDPG SERIES

Premium-grade, recessed, high performance, lay-in direct/indirect coffered T-bar troffer with modern styling and high visual comfort. Comes with dropped single basket shaped perforated metal shield. Available 2'x2' and 2'x4' configurations. Shallow design accommodates mounting into low ceiling plenums. For use in indoor applications where low glare, high quality and ease of installation are required.

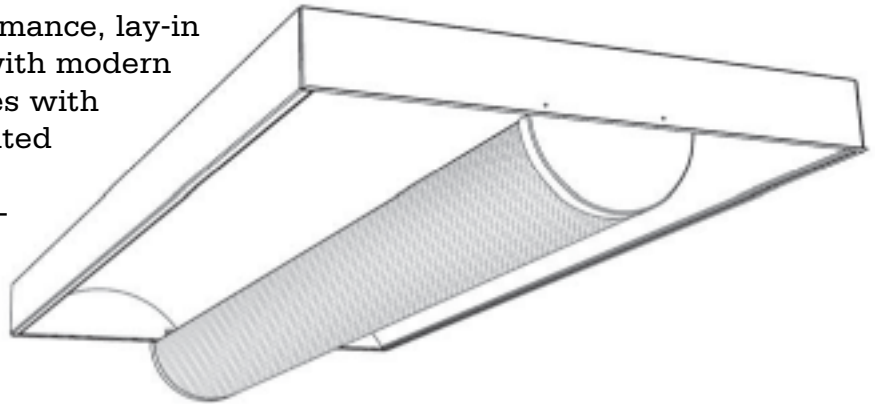

Dimensional Data

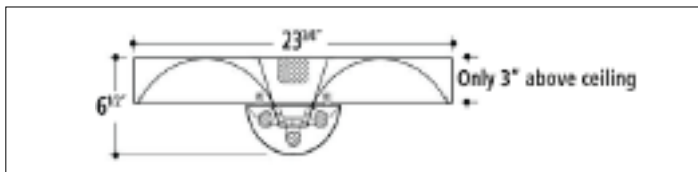

Ordering Information

Catalog #	Lamp	Size
ELECTRONIC BIAX		
SRDPG22240/UV	2-F40BIAX	2x2
SRDPG22340/UV	3-F40BIAX	2x2
SRDPG22250/UV	2-F50BIAX	2x2
SRDPG22350/UV	3-F50BIAX	2x2
SRDPG22255/UV	2-F55BIAX	2x2
SRDPG22355/UV	3-F55BIAX	2x2
ELECTRONIC OCTRON T8 & T5		
SRDPG22217/UV	2-F17T8	2x2
SRDPG22317/UV	3-F17T8	2x2
SRDPG22214/UV	2-F14T5	2x2
SRDPG22314/UV	3-F14T5	2x2
SRDPG22224HO/UV	2-F24T5HO	2x2
SRDPG22324HO/UV	3-F24T5HO	2x2
SRDPG24232/UV	2-F32T8	2x4
SRDPG24332/UV	3-F32T8	2x4
SRDPG24228/UV	2-F28T5	2x4
SRDPG24328/UV	3-F28T5	2x4
SRDPG24254HO/UV	2-F54T5HO	2x4
SRDPG24354HO/UV	3-F54T5HO	2x4

Specifications

Mounting: Holes provided for chain mounting, with integral earthquake clips.

Construction: Die formed, spot welded heavy gauge cold rolled steel with perforated steel sheilding. Dropped metal sheilding is held in place by spring hooks for easy maintenance.

Finish: Powder painted matte white visible surfaces.

Wiring: Standard voltage is universal voltage (UV).

Approval: All units are (UL) approved.

Accessories Add Suffix

EM	Emergency Ballast 1Lamp.
EM/2	Emergency Ballast 2Lamp.
DIM	Dimming Ballast. (T8 and T12)
OD	Quick Disconnect.
2BAL	Dual Ballast Switching.

Photometrics

Photometric Information available upon request.

NEW ENGLAND
LIGHTING
 INCORPORATED