



OS SIGNLIGHT SERIES


The OS Series is a single lamp all weather fluorescent fixture designed to provide the optimum in vertical control. Applications range from illuminating signs, bill boards and building facades to tunnels, under passes and bridges.

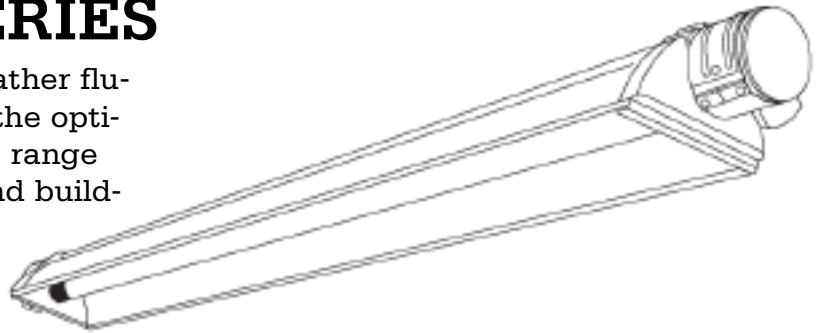

Dimensional Data

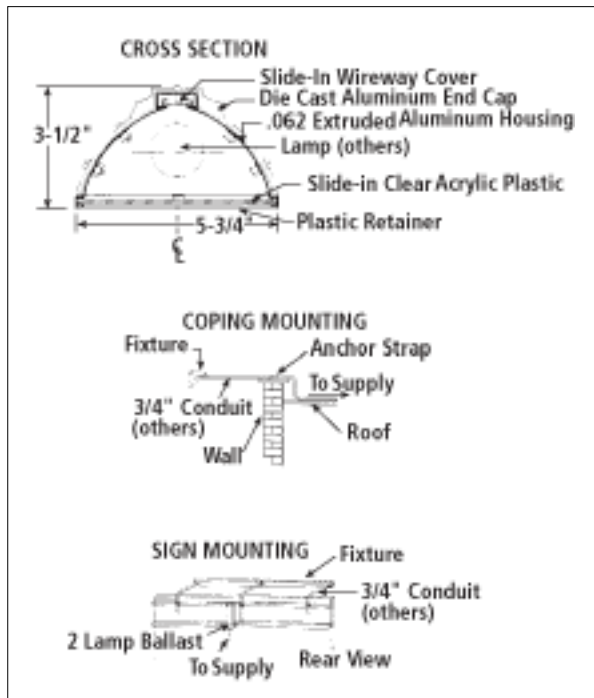

Dimensional Data

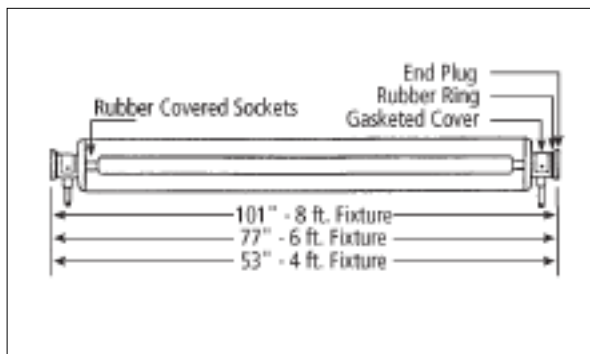

Photometrics

Photometric Information available upon request

Specifications

Mounting: Fixtures may be mounted singularly, in tandem or in continuous rows, supported by 3/4" conduit to marry with 2 way splice box (tapered for 3/4") for use between fixtures in tandem or in continuous row applications. Tandem fixtures can be mounted either continuously or separately.

Construction: .062 weather resistant extruded white aluminium housing incorporating integral wire way to facilitate all wiring.

Diffuser: Clear acrylic diffuser slides into grooves in housing to insure the weatherproof integrity of this fixture.

Features: Parabolic shape design for maximum light control. Telescoping lamp holders with rubber sleeve protects contacts and seals out moisture and dirt. 360 degree pivot-cast aluminium end caps.

Wiring: All ballasts are remote, weatherproof and rated - 20° F. 120v.

Approval: All units are UL listed.

Ordering Information

Catalog #	Lamp	Length
800MA HIGH OUTPUT	1-LITE	T12

OS148HO	1-F48T12HO	4'
OS172HO	1-F72T12HO	6'
OS196HO	1-F96T12HO	8'
OS148THO	2-F48T12HO	8'
OS172THO	2-F72T12HO	12'
OS196THO	2-F96T12HO	16'

Indoor Ballast - Suffix catalog number w/ **INBAL VOLTAGE**
 EXAMPLE: OS196HO/INBAL-120V

NEW ENGLAND
LIGHTING
 INCORPORATED