


T5 SIGNLIGHT SERIES

Indoor and outdoor T5 SignLight with internal ballast compartment. No remote ballast is needed.



INDOOR/OUTDOOR

Dimensional Data

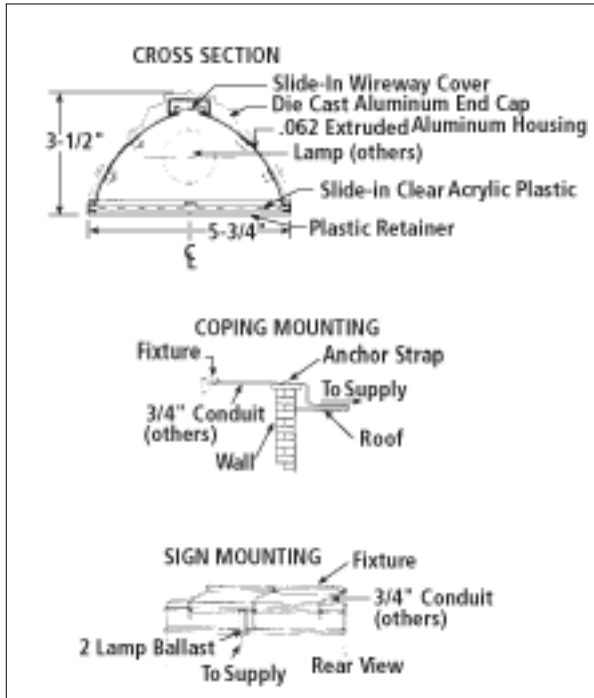

Specifications

Mounting: Fixtures may be mounted singularly, in tandem or in continuous rows supported by 3/4" conduit to marry with 2 way splice box (tapered for 3/4"), for use between fixtures and tandem or in continuous row applications..


Construction: Extruded aluminum body, cast aluminum end plates and white powdercoat finish on inside and outside.

Diffuser: Clear extruded acrylic lens to insure the weatherproof integrity of the fixture.

Wiring: Standard ballasts are universal voltage -20°F

Approval: All units are Underwriter's Laboratories (UL) approved.

Dimensional Data

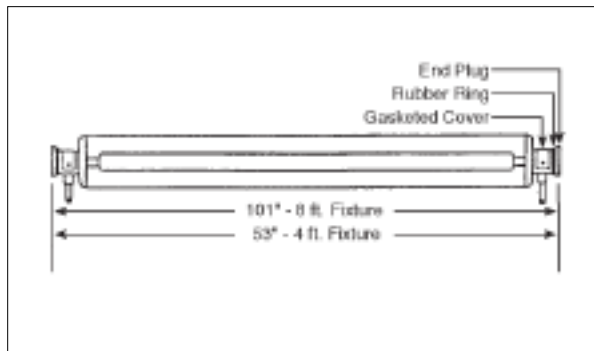

Ordering Information

Catalog #	Lamp	Length
SL14T5HO	1-F54T5HO	4'
SL24T5HO	2-F54T5HO	4'
SL28T5HO	2-F54T5HO	8'
SL48T5HO	4-F54T5HO	8'

Photometrics

Photometric Information available upon request

