


T5 SIGNLIGHTS SERIES

Indoor and outdoor T5 Sign Light with internal ballast compartment. No remote ballast is needed.



INDOOR/OUTDOOR

Dimensional Data

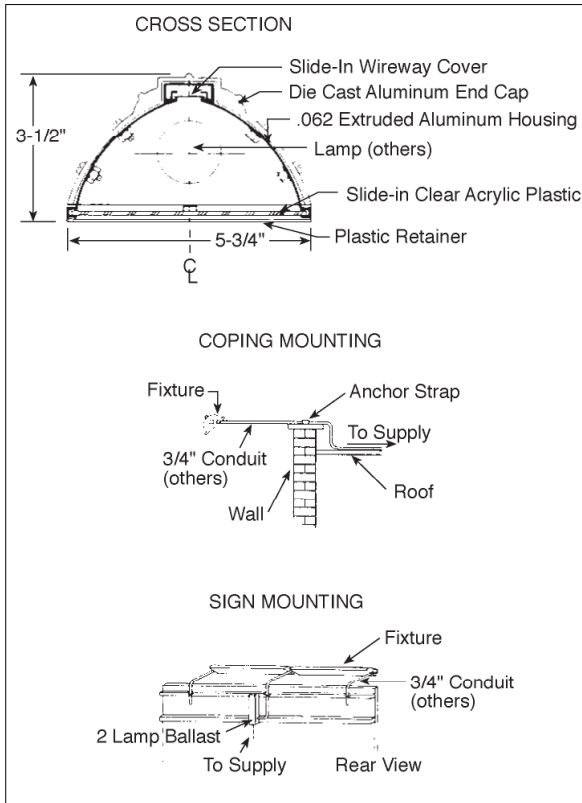

Specifications

Mounting: Fixtures may be mounted singularly, in tandem or in continuous rows supported by 3/4" conduit to marry with 2 way splice box (tapered for 3/4"), for use between fixtures and tandem or in continuous row applications.


Construction: Extruded aluminum body, cast aluminum end plates and white powdercoat finish on inside and outside.

Diffuser: Clear extruded acrylic lens to insure the weatherproof integrity of the fixture.

Wiring: Standard ballasts are universal voltage.

Approval: All units are Underwriter's Laboratories (UL) approved.

Installation Data

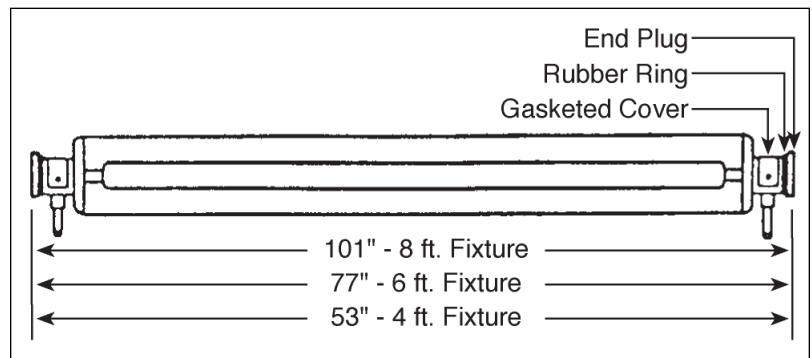

Ordering Information

T5 SIGNLIGHTS

Type	Lamp	Size
SL14T5HO	1-54T5HO	4'
SL24T5HO	2-54T5HO	4'
SL28T5HO	2-54T5HO	8'
SL48T5HO	4-54T5HO	8'

