


# NW SERIES

Concentrated lighting is the essence of this premium shelf or wall light. A clear prismatic diffuser distributes maximum controlled brightness of one or two lamps on work area. Can be mounted under overhang or directly to wall.



## Dimensional Data

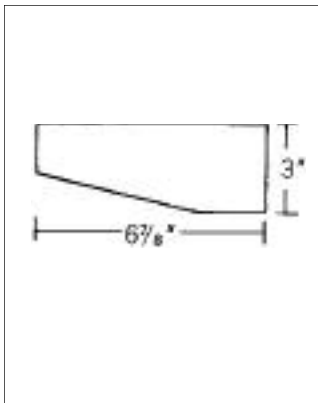

## Specifications

**Construction:** Fixture housing die-formed of heavy gauge cold roll steel provided with adequate knockouts and mounting holes for either wall or shelf mounting.

**Diffuser:** Snap-in clear prismatic lens of extruded acrylic for controlled light.

**Finish:** All metal components are phosphate coated and electro-statically sprayed with a high quality baked white enamel with a minimum reflectance of 87%.

**Wiring:** Ballast are 120 volt, 60 hertz.

**Approval:** All units are Underwriter's Laboratories (UL) approved.

## ORDERING INFORMATION


Catalog # 1 Light	Catalog # 2 Light	Lamp	Length
<b>MAGNETIC</b>			
<b>UNW115</b>	<b>UNW215</b>	<b>F15T12</b>	<b>18"</b>
<b>UNW120</b>	<b>UNW220</b>	<b>F20T12</b>	<b>24"</b>
<b>UNW130ES</b>	<b>UN230ES</b>	<b>F30T12</b>	<b>36"</b>
<b>UNW140ES</b>	<b>UNW240ES</b>	<b>F40</b>	<b>48"</b>
<b>ELECTRONIC OTRON</b>			
<b>UNW120EBO</b>	<b>UNW220EBO</b>	<b>FO17T8</b>	<b>24"</b>
<b>UNW130EBO</b>	<b>UNW230EBO</b>	<b>FO25T8</b>	<b>36"</b>
<b>UNW140EBO</b>	<b>UNW240EBO</b>	<b>FO32T8</b>	<b>48"</b>

## Options and Accessories *Add Suffix*

- \*CW Low temperature ( 0 ) ballast
- \*DIM Dimming ballast
- EM Emergency Ballast ( 1 light )
- EM/2 Emergency Ballast ( 2 light )
- RFI Radio Interference Filter
- FS External Fuse and Holder
- SW White Turn Switch
- CO Grounded Convenience Outlet

\*Available Magnetic T12 or Electronic T8.  
•Note: Consult Factory on Compatibility EM/2 Option.

## Installation Data

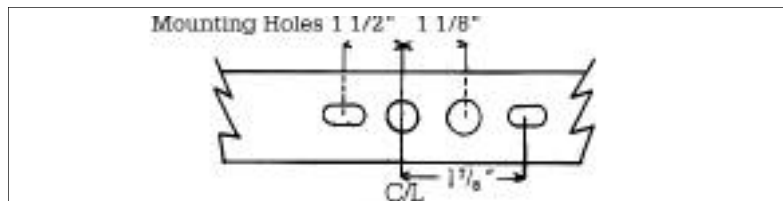

## Photometrics

Photometric Information available upon request.

NEW ENGLAND  
**LIGHTING**  
INCORPORATED

