



UN SERIES

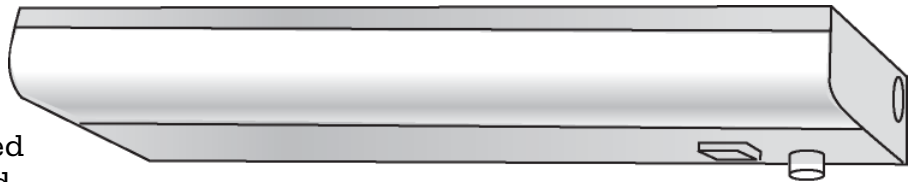

The shallow silhouette of this undercabinet series suited to brighten under cabinet and shelf work areas. The opal acrylic wrap-around diffuser combined with white finish gently lights work area. Turn switch and grounded convenience outlet standard.

Dimensional Data

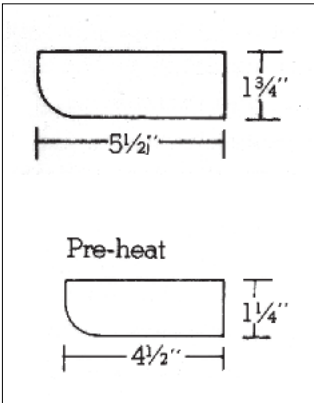

Specifications

Construction: Fixture housing die-formed of heavy gauge cold rolled steel provided with adequate knockouts and mounting holes for ease of installation.

Diffuser: Snap-in light stable opal acrylic.

Finish: Exteriors and interiors surfaces electro-statically sprayed with high quality white enamel with a minimum reflectance of 87%.


Wiring: White turn switch and grounded convenience outlet standard. Ballast are 120 volt.

Approval: All units are Underwriter's Laboratories (UL) approved.

Ordering Information

Catalog #	Lamp	Length	Catalog #	Lamp	Length
MAGNETIC AND ELECTRONIC T12			ELECTRIC OCTRON T8		
UN15PH	F15T8	18"			
UN15TS	F15T12	18"			
UN20TS	F20T12	24"	UN20EBO	F17T8	24"
UN30RS	F30T12	36"	UN30EBO	F25T8	36"
UN40RS	F40T12	48"	UN40EBO	F32T8	48"

Installation Data

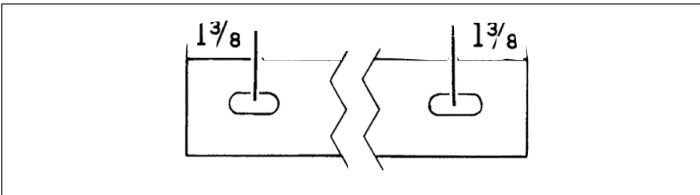

Options and Accessories Add Suffix

DIM	Dimming Ballast
EM	Emergency Ballast
FS	Internal fuse and holder
CORD-3W	6í 3 Wire Cord
NSWCO	No Switch or Outlet
NSW	No Switch
NCO	No Convenience Outlet

Photometrics

Photometric Information available upon request.

NEW ENGLAND

 I N C O R P O R A T E D