



UT SERIES ULTRA THIN UNDER SHELF LIGHTS

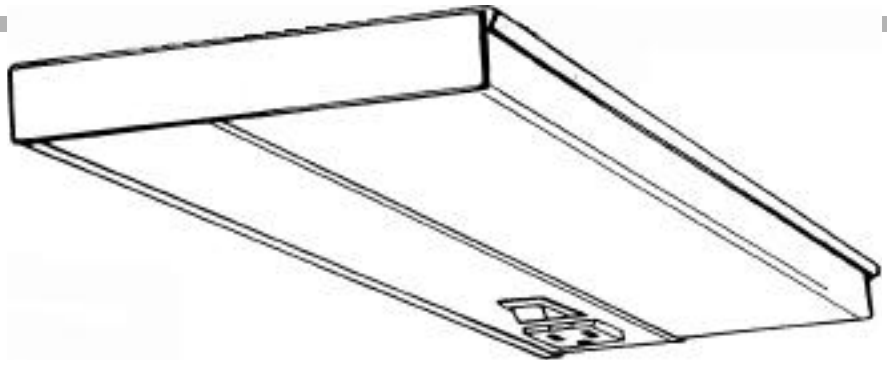

Ultra Thin's unique 1" silhouette provides the ideal solution to those hard-to-light under cabinet and shelf work areas. A variety of lengths and lamp sizes allows for adequate illumination for all size spaces.

Dimensional Data

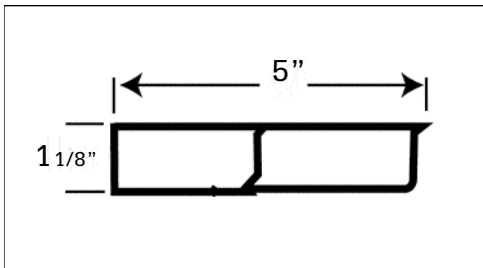

Specifications

Mounting: All units provided with 2 keyhole slots, 4 knock-outs and BX Connector for ease of installation.

Construction: Fixture housing made of heavy gauge die-formed cold roll steel with no visible external hardware. Snap-in opal diffuser of highly durable, light-stable acrylic. Finish baked white enamel.

Wiring: All T5 Lamps. 13 watt Ballast instant start, 8 watt preheat with concealed starter. On-off rocker switch, grounded convenience outlet, 6'2 or 3 wire cord set optional..

Approval: All units are Underwriter's Laboratories (UL) listed.

ORDERING INFORMATION

| ON-OFF ROCKER SWITCH | | | NO SWITCH | | |
|----------------------|---------|--------|-----------|---------|--------|
| Catalog # | Lamp | Length | Catalog # | Lamp | Length |
| UT8 | 1-F8T5 | 12" | UT8-S | 1-F8T5 | 12" |
| UT28 | 2-F8T5 | 24" | UT28-S | 2-F8T5 | 24" |
| UT13 | 1-F13T5 | 21" | UT13-S | 1-F13T5 | 21" |
| UT813 | 1-F13T5 | 33" | UT813-S | 1-F13T5 | 33" |
| UT213 | 2-F13T5 | 42" | UT213-S | 2-F13T5 | 42" |

NEW ENGLAND
LIGHTING
INCORPORATED




UT SERIES

ULTRA THIN

UNDER SHELF

LIGHTS

Installation Data

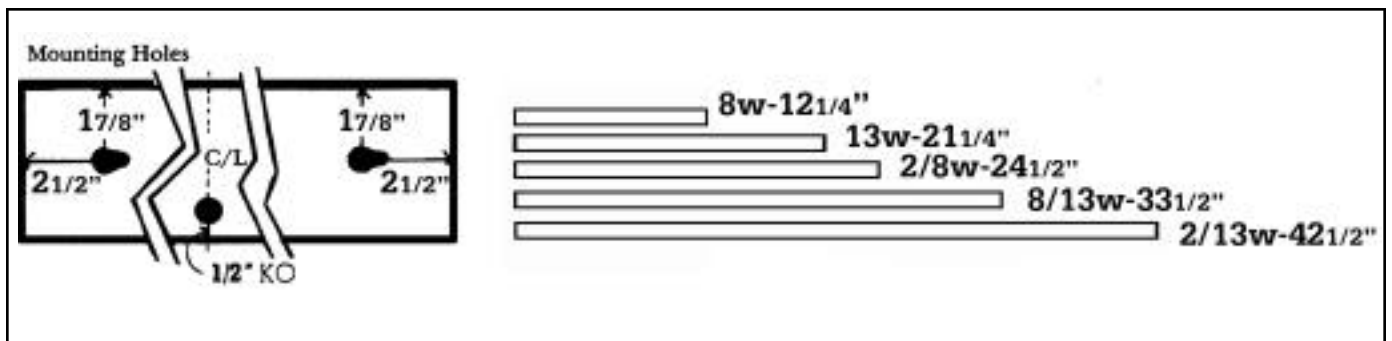

Options

| | |
|------------------|-----------------------------|
| CO | Grounded Convenience Outlet |
| SF | Solid Front |
| Cord | 6'2" Wire Cord |
| Cord / 3W | 6'3" Wire Cord |

NEW ENGLAND

 INCORPORATED

